

# RSA NetWitness Logs

## Event Source Log Configuration Guide



## GIT

Last Modified: Friday, May 19, 2017

### **Event Source Product Information:**

**Vendor:** [GIT](#)

**Event Source:** GIT

**Versions:** 1.7.6

**Additional Downloads:** sftagent.conf.git

### **RSA Product Information:**

**Supported On:** NetWitness Suite 10.0 and later

**Event Source Log Parser:** git

**Collection Method:** File

**Event Source Class.Subclass:** Storage.Content Management Systems

# Configure GIT

---

GIT is a free and open source, distributed version control system. It can handle very large projects with speed and efficiency. GIT has full revision tracking capabilities, and is not dependent on network access or a central server.

To configure GIT, you must complete these tasks:

- I. Set Up the SFTP Agent
- II. Configure the Log Collector for File Collection

## Set Up the SFTP Agent

To set up the SFTP Agent Collector, download the appropriate PDF from RSA Link:


- To set up the SFTP agent on Windows, see [Install and Update SFTP Agent](#)
- To set up the SFTP agent on Linux, see [Configure SA SFTP Agent shell script](#)

## Configure the Log Collector for File Collection

Perform the following steps to configure the Log Collector for File collection.

### To configure the Log Collector for file collection:


1. In the **NetWitness** menu, select **Administration > Services**.
2. In the Services grid, select a Log Collector, and from the Actions menu, choose **View > Config > Event Sources**.
3. Select **File/Config** from the drop-down menu.  
The Event Categories panel displays the File event sources that are configured, if any.
4. In the Event Categories panel toolbar, click **+**.  
The Available Event Source Types dialog is displayed.

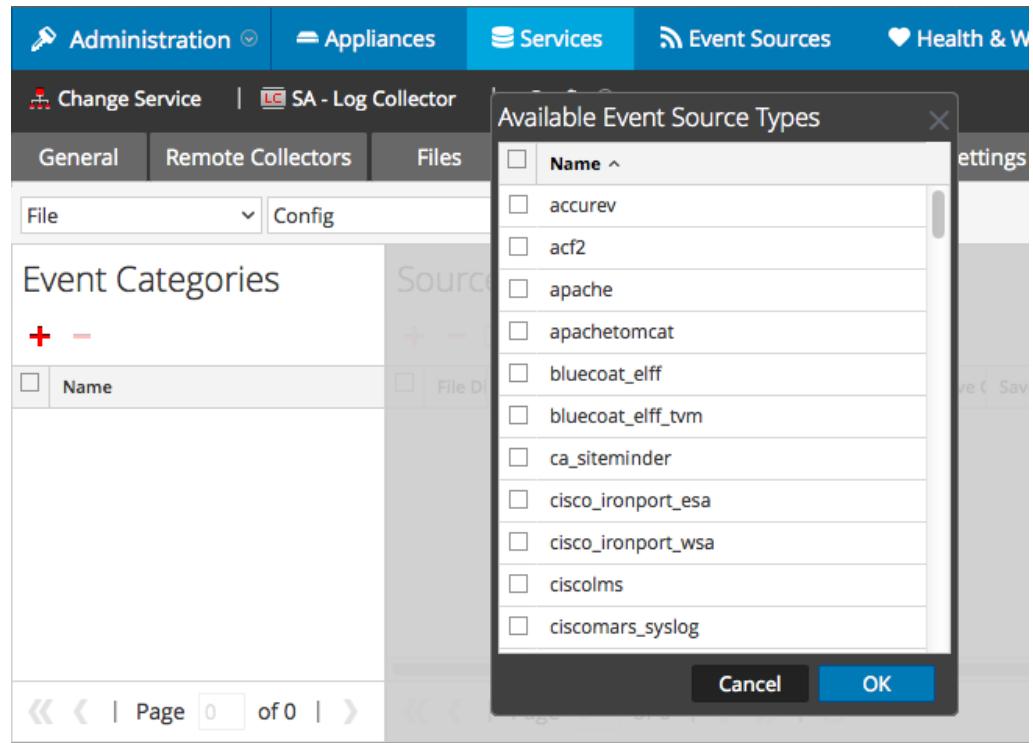

5. Select the correct type from the list, and click **OK**.


Select **git** from the Available Event Source Types dialog.

The newly added event source type is displayed in the Event Categories panel.

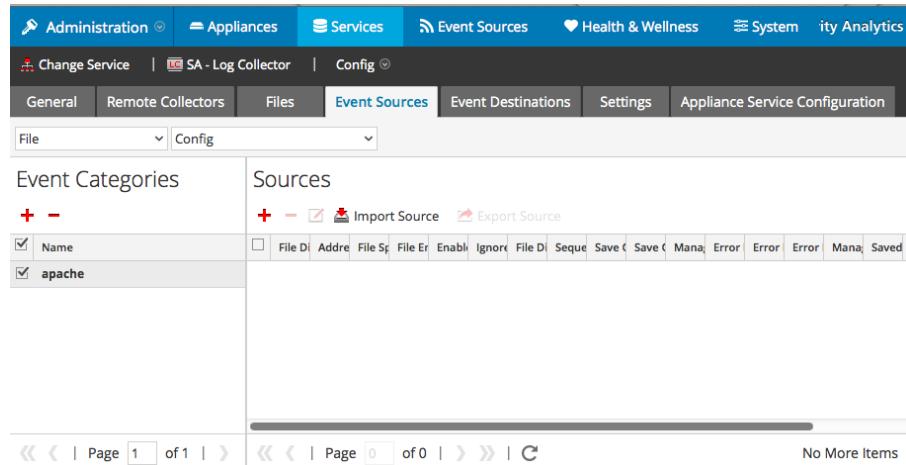

6. Select the new type in the Event Categories panel and click **+** in the Sources panel toolbar.

The Add Source dialog is displayed.

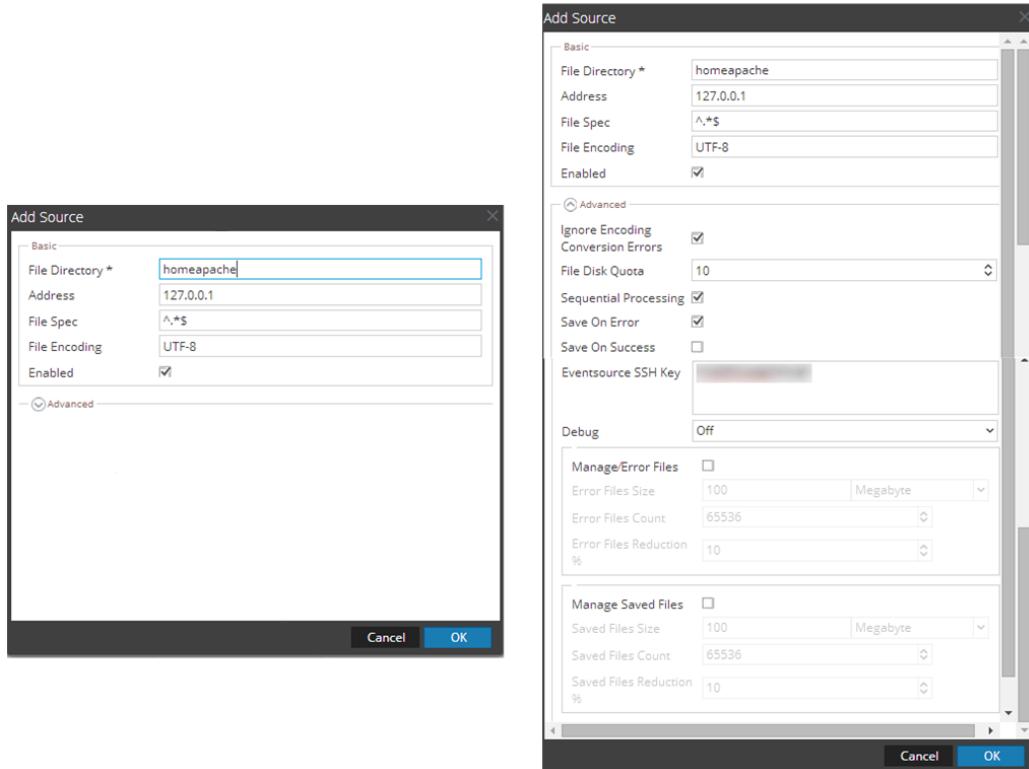

7. Add a File Directory name, modify any other parameters that require changes, and click **OK**.
8. Stop and Restart File Collection. After you add a new event source that uses file collection, you must stop and restart the NetWitness File Collection service. This is necessary to add the key to the new event source.

Copyright © 2017 EMC Corporation. All Rights Reserved.

## Trademarks

RSA, the RSA Logo and EMC are either registered trademarks or trademarks of EMC Corporation in the United States and/or other countries. All other trademarks used herein are the property of their respective owners.